


FI SP E MP

Filterelement spinnfiltrile MP



Omadused

Erilised tunnused	Δp max 4 baari
Temperatuur min. °C	-25
Temperatuur max. °C	120
Materjal	Tihend: NBR
Töörõhk bar	12
Verwendung	für Spin-On Filter FI SP R 1, FI SP R 2, FI SP R 3

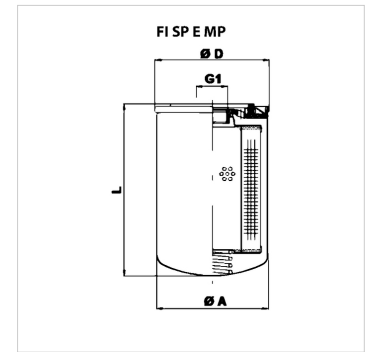

Artikkel

Märgistus	Filtri pind (cm ²)	Mahuvool max. (l/min)	G1	Filtermaterjal	Filtri peensus (µm)	für Filtertyp	Ø A (mm)	Ø D (mm)	L (mm)	Kaal (kg)
FI SP E MP 0147 A10	2419	100	G 3/4"	anorgan- isch	10,0	FI SP R 48, 55	95,0	96,0	147,0	0,700
FI SP E MP 0147 P10	2419	100	G 3/4"	organisch	10,0	FI SP R 48, 55	95,0	96,0	147,0	0,600
FI SP E MP 0213 A03	3975	100	G 3/4"	anorgan- isch	3,0	FI SP R 53, 58	96,0	97,0	213,0	0,930
FI SP E MP 0213 A06	3975	100	G 3/4"	anorgan- isch	6,0	FI SP R 53, 58	96,0	97,0	213,0	0,900
FI SP E MP 0213 A10	3975	100	G 3/4"	anorgan- isch	10,0	FI SP R 53, 58	96,0	97,0	213,0	0,900
FI SP E MP 0213 P10	3975	100	G 3/4"	organisch	10,0	FI SP R 53, 58	96,0	97,0	213,0	0,800
FI SP E MP 0210 P25	3875	100	G 3/4"	organisch	25,0	FI SP R 53, 58	96,0	97,0	213,0	0,800
FI SP E MP 0182 A10	5076	300	G 1,1/4"	anorgan- isch	10,0	FI SP R 110, 130, 215, 280, 220, 282	129,0	130,0	182,0	1,300
FI SP E MP 0182 P10	5076	300	G 1,1/4"	organisch	10,0	FI SP R 110, 130, 215, 280, 220, 282	129,0	130,0	182,0	1,200
FI SP E MP 0228 A06	6358	300	G 1,1/4"	anorgan- isch	6,0	FI SP R 115, 150, 250, 290, 255, 293	129,0	130,0	228,0	1,470
FI SP E MP 0228 A10	6358	300	G 1,1/4"	anorgan- isch	10,0	FI SP R 115, 150, 250, 290, 255, 293	129,0	130,0	228,0	1,470
FI SP E MP 0228 P10	6732	300	G 1,1/4"	organisch	10,0	FI SP R 115, 150, 250, 290, 255, 293	129,0	130,0	228,0	1,360

Qmaks – maksimaalne mahuvool

Lisatarvikud

FI SP R/S FK Tagasivoolu spinnfiltriltri tripea / imifilter

on järgnevate toodete varuosad

FI SP R 1	Tagasivoolu spinnfilter, tüüp 1
FI SP R 2	Tagasivoolu spinnfilter, tüüp 2
FI SP R 3	Tagasivoolu spinnfilter, tüüp 3